


## PROFESSIONAL AUDIO SYSTEM

# N8

### Features:

- Two-way passive speaker with one 8" woofer and one 1.5" driver.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 8" woofer is made from Ø 50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- The high frequency driver is protected by special design circuit to avoid being damaged when overload.
- Rotatable 90° x 60° (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.

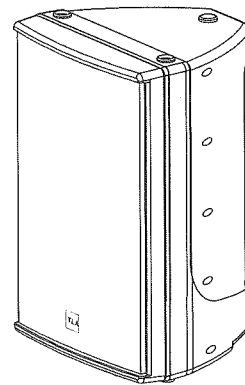

# TLA

# CE

### Model:N8

#### Technical Parameters

System: Built-in Crossover Two Way Full Range Speaker  
Driver Quantity: 8" x1 (Bass) 1x Ø 34mm Driver

Frequency Response(-3dB): 75Hz-18KHz  
Frequency Response(-10dB): 60Hz-20KHz  
Sensitivity(dB/1M/1W): 92 dB


Impedance: 8 Ohm  
Recommendatory Power(RMS/W): 100 W  
Tweeter Dispersion(HxV): 90°x60°

Harmonic Distortion: ≤ 1%  
Connectors: 1xNL4  
Dimensions(WxDxH mm/pcs): 277X257X400mm  
Packing Dimensions(WxDxH mm/pair) 360X330X475mm  
Net Weight(Kg/pc): 6.5Kg  
Gross Weight(Kg/pc): 8.0Kg




# PROFESSIONAL AUDIO SYSTEM


# N8

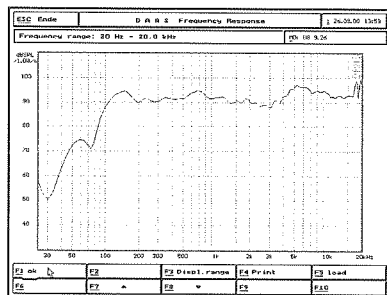


Frequency response, SPL/2.83v

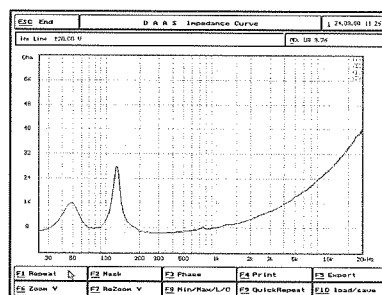



Impedance curve

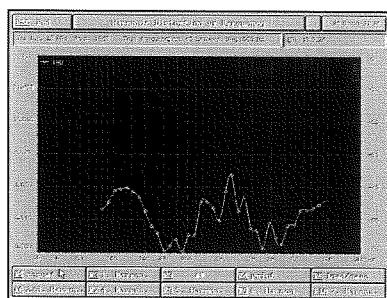

Harmonic distortion 106dB/2.5m, nominal impedance

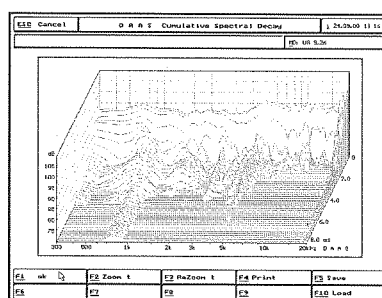

Waterfall spectrum analysis

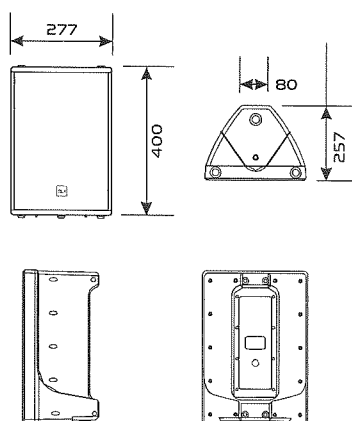

Two Way Crossover